




WB01

- ✓ MTP WB01 is designed for loaders, graders and dump trucks
- ✓ E3/L3 tread pattern for superior traction
- ✓ Optimal durability and enhanced working comfort

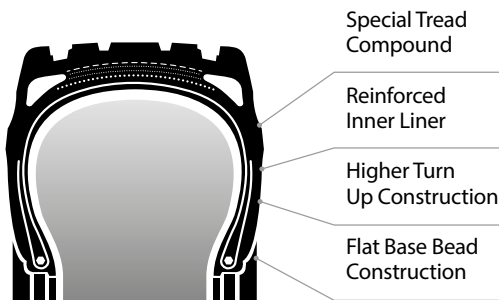

Size	TRA Code	Load Symbol	Max. Speed (km/h)	Load Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity (kg)	Cold Inf. Pressure (kPa)	Weight (kg)
15.5R25	L3	*	10	169A2	12.00/1.3	26	1275	395	5800	500	128
20.5R25	E3/L3	**	50	177B	17.00/2.0	33	1490	520	7300	525	235
			10	168A2					9500	500	
23.5R25	E3/L3	**	50	185B	19.50/2.5	36	1615	595	9250	525	316
			10	195A2					12150	500	
26.5R25	E3/L3	**	50	193B	22.00/3.0	37	1750	675	11500	525	439
			10	202A2					15000	500	
29.5R25	E3/L3	**	50	200B	25.00/3.5	43	1875	750	14000	525	599
			10	208A2					18000	500	
21.00R35	E3	**	50	201B	15.00/3.0	44	2005	570	14500	700	588

MTP Tyres

P.O. Box 436
5140 AK Waalwijk
The Netherlands

Elzenweg 7
5144 MB Waalwijk
The Netherlands

Phone: +31 416 82 00 32
Fax: +31 416 82 00 33
info@universaltyretrading.com

WWW.MTPTYRES.COM